


SHELL MILL ARBOR AUFNAHMEDORN FÜR FRÄSER MIT BOHRUNG

DIN69871-SK

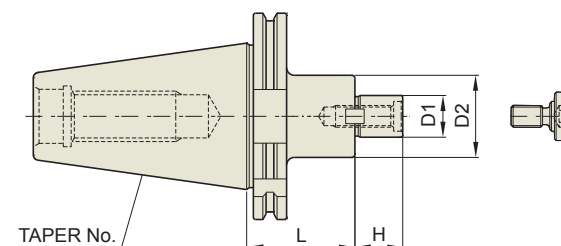

DIN69871 -SK	Taper Accuracy AT3	G Value 6.3	RPM 12,000	Coolant System
-----------------	--------------------------	----------------	---------------	-------------------

■ STANDARD

TAPER No.	CODE No.	D1	D2	L	H	Weight (kg)
30	SK30-SMA16-50	16	32	50	17	0.85
	SK30-SMA22-50	22	40	50	19	0.90
	SK30-SMA27-50	27	48	50	21	1.03
40	SK40-SMA16-60	16	32	60	17	0.35
	SK40-SMA22-60	22	40	60	19	1.45
	SK40-SMA27-60	27	48	60	21	1.70
	SK40-SMA32-60	32	58	60	24	1.80
50	SK40-SMA40-60	40	70	60	27	3.10
	SK50-SMA16-75	16	32	75	17	2.80
	SK50-SMA22-75	22	40	75	19	3.10
	SK50-SMA27-75	27	48	75	21	3.40
	SK50-SMA32-75	32	58	75	24	3.80
	SK50-SMA40-75	40	70	75	27	4.50
	SK50-SMA50-75	50	90	75	30	5.90

■ EXTENDED

TAPER No.	CODE No.	D1	D2	L	H	Weight (kg)
40	SK40-SMA16-120	16	32	120	17	1.70
	SK40-SMA22-120	22	40	120	19	1.80
	SK40-SMA27-120	27	48	120	21	2.40
	SK40-SMA32-120	32	58	120	24	3.70
50	SK50-SMA16-120	16	32	120	17	3.90
	SK50-SMA22-120	22	40	120	19	4.40
	SK50-SMA27-120	27	48	120	21	4.70
	SK50-SMA32-120	32	58	120	24	5.00
	SK50-SMA40-120	40	70	120	27	6.05