




RC\*\* Toolholder · Halter

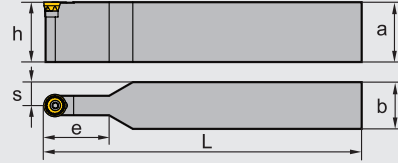

S-Clamping · S-Halter

### SRDCN

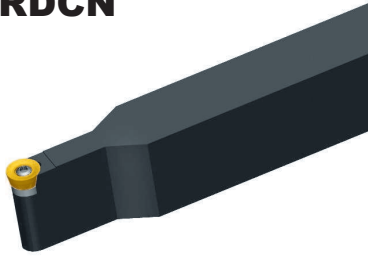

Type · Typ		Stock Lager	Dimension (mm) Abmessung						Screw Schraube	Shim Unterlage	Shim Screw, Unterlage Schraube	Wrench Schlüssel
			a	b	L	h	s	e				
<b>SRDCN</b>	<b>1616H08</b>	●	16	16	100	16	8	16	I60M3×7	—	—	WT10IP
	<b>2020K08</b>	●	20	20	125	20	10	16	I60M3.5×10	—	—	WT15IP
	<b>2020K10</b>	○	20	20	125	20	10	25				
	<b>2525M10</b>	●	25	25	150	25	12.5	25				
	<b>2020K12</b>	●	20	20	125	20	10	35	I60M3.5×12	R12BS	SM5×8.65XA	WT15IP WH35L
	<b>2525M12</b>	●	25	25	150	25	12.5	35				
	<b>3225P12</b>	●	32	25	170	32	12.5	35				
	<b>3225P16</b>	●	32	25	170	32	12.5	35	I60M4×15X	R16BS	SM6×10XA	WT15IP WH40L
	<b>3232P16</b>	●	32	32	170	32	16	40				
	<b>4040S16</b>	●	40	40	250	40	20	50				
<b>4040S16</b>	●	40	40	250	40	20	50					

Applicable insert  
Wendeschneidplatten

Application Anwendung	Semi-Finishing Mittlere Bearbeitung	Al machining Alu Bearbeitung
insert shape Schneidplattenform	 A100	<b>LH</b>  A100
<b>SRDCN**H08</b>	RCMT0803MO	RCGX0803MO-LH
<b>SRDCN**H / K / M10</b>	RCMT10T3 MO	
<b>SRDCN**K / M / P12</b>	RCMT1204 MO	
<b>SRDCN**P / S16</b>	RCMT1606 MO	
<b>SRDCN**P / S20</b>	RCMT2006 MO	

Holder not suitable for RCMX inserts  
Halter nicht für RCMX Platten geeignet